

THE NETHERLANDS  
(N E D E R L A N D)

## ASSESSMENT OF CERTIFICATE SUPPLEMENTATION

Test report number : RDW-TR-04016

Approval number(s) : e4\*94/20\*4143  
e4\*94/20\*4144

Make : Monoflex

Decision : Extension

Revision

is OK/~~is not OK~~ without testing.

Motivation : The RDW allows an increase in D-value of max. 3% compared to the actually tested value.  
The original testload was 6,39 kN.  $\rightarrow 6,39 + 3\% = 6,58$  kN.  
The required testload for a D-value of 10,96 is:  $10,96 * 0,6 = 6,58$  kN.  
Therefore a D-value of 10,96 kN is acceptable.


The coupling device with approval no. ....4143 is also suitable for a different vehicle type.

There are no technical modifications to the coupling devices.


Place : Lelystad

Date : 29 Nov. 2010

Signature :

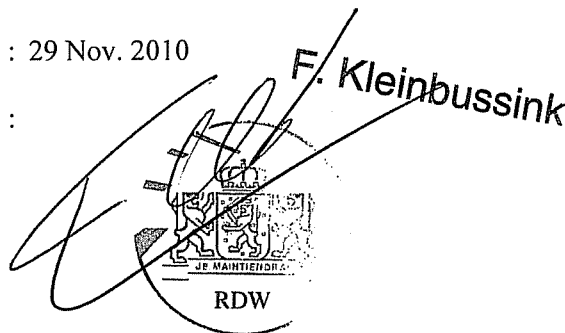

F. Kleinbussink

Test departmentP.O. Box 777  
2700 AT Zoetermeer  
The NetherlandsTest centreTalingweg 76  
8218 NX Lelystad  
The Netherlands*Vehicle Approval and Information*

THE NETHERLANDS  
(N E D E R L A N D)

## EC TYPE-APPROVAL CERTIFICATE

Communication concerning the:

- ~~type approval~~<sup>(4)</sup>
- extension of type-approval<sup>(1)</sup>
- ~~refusal of type approval~~<sup>(4)</sup>
- ~~withdrawal of type approval~~<sup>(4)</sup>

of a type of a component with regard to Directive 94/20/EC.

**Type-approval number**<sup>(2)</sup> : e4\*94/20\*4143\*01Reason for extension : - Increase of D-value  
- Coupling device also suitable for a different vehicle type. (See RDW-TR-04016)*Approval mark* : See example of type plate

## SECTION I


- 0.1. Make (trade name of manufacturer) : Monoflex
- 0.2. Type and general commercial description(s) : 46.0232
- 0.3. Means of identification of type if marked on the component<sup>(3)</sup> : Type approval number
- 0.3.1. Location of that marking : On type plate
- 0.5. Name and address of manufacturer : Monoflex Nordic AB  
Nibblegatan 21, Box 14  
734 21 Hallstahammar Sweden
07. In the case of components and separate technical units, location and method of affixing of the EEC approval mark : On type plate
- 0.8. Name(s) and address(es) of assembly plant(s) : See information document (annex III, item 0.8)



SECTION II

1. Additional information (where applicable) : see Appendix I
2. Technical service responsible for carrying out the tests : RDW  
Test Centre Lelystad  
Talingweg 76  
8218 NX Lelystad
3. Date of test report : 02-06-2010
4. Number of test report : RDW-94/20-6396
5. Remarks (if any) : see Appendix I
6. Place : Zoetermeer
7. Date : 29-11-2010

8. Signature

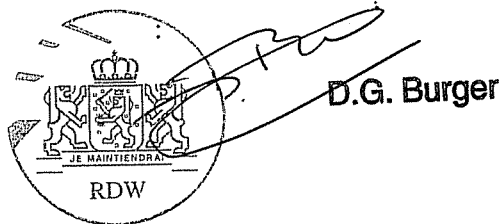

D.G. Burger

The image shows a circular stamp of the RDW (Rijksdienst voor het Verkeerswetgeving) with a signature over it. The stamp contains the text 'RDW' at the bottom and 'JE M'AINTIENDRA' at the top. The signature is written in black ink and appears to be 'D.G. Burger'.

9. The index to the information package lodged with the competent authority that has granted type-approval, which may be obtained on request, is attached:
  - Application form relating to Annex III and annexed drawings.
  - Drawings and instructions for attachment.
  - Fitting instructions.

<sup>(1)</sup> Delete where not applicable.

<sup>(2)</sup> The EEC type-approval number appearing on this document shall consist of all sections outlined in Annex VII to Directive 70/156/EEC, as last amended by Directive 92/53/EEC. The component itself shall be marked as prescribed in the relevant separate Directive.

<sup>(3)</sup> In the means of identification of type contains characters not relevant to describe the component types covered by this type-approval certificate such characters shall be represented in the documentation by the symbol “?” (e.g. ABC??123).

## APPENDIX I

to EEC type-approval certificate number: e4\*94/20\*4143\*01

concerning the component type-approval of mechanical coupling devices with regard to Directive 94/20/EC.

1. Additional information
- 1.1. Class of the type of coupling : F
- 1.2. Categories or types of vehicles for which the device is designed or restricted : See fitting instructions
- 1.3. Maximum D-value <sup>(1)</sup> : 10,96 kN
- 1.4. Maximum vertical load S at the coupling point <sup>(1)</sup> : 80 kg
- 1.5. Maximum load U at the fifth wheel coupling point <sup>(1)</sup> : --- tonnes
- 1.6. Maximum V-value <sup>(1)</sup> : --- kN
- 1.7. Instructions for attachment of the coupling type to the vehicle and photographs or drawings of the fixing points at the vehicle given by the manufacturer; additional information if the use of the coupling type is restricted to special types of vehicles : See fitting instructions
- 1.8. Information on the fitting of special towing brackets or mounting plates <sup>(1)</sup> : See fitting instructions
5. Remarks <sup>(2)</sup> : The installation of the coupling device on the vehicle must be checked according to the requirements given in Annex VII (see Annex I Paragraph 5.10.)

<sup>(1)</sup> Delete where not applicable.

<sup>(2)</sup> Including information as to whether fifth wheel couplings are unsuitable for positive steering.

